

## Thermal Insulation Products - Banding & Seals

### SEALUMET BANDING


**Product Code : BANDING-53**

Insulation Banding is supplied in 3003/1050 Aluminium, 304L/316L Stainless Steel and Galvanised Steel in various widths and thicknesses, eg 9.5mm, 12.7mm, 20mm, 25.4mm, 40.0mm and 50.8mm. Banding is supplied in catch weight coils varying between 15-25 kgs, or in coils 2kgs and 5kgs. (Subject to a decoiling charge).

The banding can be supplied in thickness of 0.4mm, 0.5mm, 0.6mm, 0.7mm, 0.8mm, 0.9mm and 1.0mm thick depending on project specifications

Approximate mtr/kg are as follows based on 0.5mm thick

Size	Stainless Steel	Aluminium
3/8" 9.5mm x 0.5mm	25 mtr/kg	74 mtr/kg
1/2" 12.7mm x 0.5mm	19 mtr/kg	57 mtr/kg
5/8" 16.0mm x 0.5mm	16 mtr/kg	44 mtr/kg
3/4" 20.0mm x 0.5mm	13 mtr/kg	37 mtr/kg
1" 25.4mm x 0.9mm	6 mtr/kg	16 mtr/kg
1 1/4" 40.0mm x 0.9mm	4.5 mtr/kg	10 mtr/kg
2" 50.8mm x 0.9mm	2.7 mtr/kg	8 mtr/kg

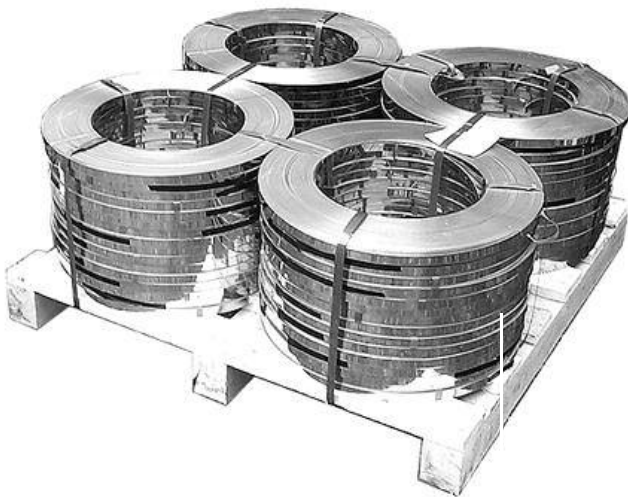

#### DISCLAIMER

These data sheets are based on specifications, data and test results at time of publication. No guarantee as to completeness, accuracy or results is either expressed or implied. The suitability for an intended use is the responsibility of the user. As choice of material, method of application and site conditions are beyond our control we accept no liability for direct or consequential damages. Any material proved to be defective within the published shelf life\* will be replaced. \*From date of supply.